

# SMD Power Inductor

TMPC0302H-Series(G)


## 1. Features

1. Carbonyl Powder.
2. Compact design.
3. High current , low DCR , high efficiency.
4. Very low acoustic noise and very low leakage flux noise.
5. High reliability.
6. 100% Lead(Pb)-Free and RoHS compliant.




## 2. Applications


Note PC power system , incl. IMVP-6  
DC/DC converter .



## 3. Dimensions

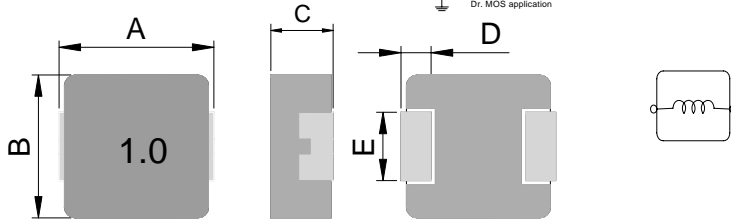

### Recommend PC Board Pattern



Series	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)
TMPC0302H	3.5±0.2	3.2±0.2	1.8±0.2	0.7±0.2	1.2±0.2

L(mm)	G(mm)	H(mm)
4.1	1.9	1.45

## 4. Part Numbering



A: Series  
 B: Dimension  
 C: Type  
 D: Inductance  
 E: Inductance Tolerance

BxC  
 Carbonyl Powder.  
 1R0=1.00uH  
 M=±20%, Y=±30%, 印字:黑色,單向印字,1.0 中間打點.

## 5. Specification

Part Number	Inductance L0 (uH)±20% @ 0 A	I rms (A) Typ.	I sat (A) Typ.	DCR(mΩ) Typ.@25°C	DCR(mΩ) Max.@25°C
TMPC0302H-R47MG	0.47	7.0	9.0	19.7	23
TMPC0302H-R68MG	0.68	5.5	7.0	25.5	29
TMPC0302H-1R0MG	1.00	4.0	5.0	32	38
TMPC0302H-1R5MG	1.50	3.8	4.0	42	50
TMPC0302H-2R2MG	2.20	3.5	3.7	65	75
TMPC0302H-3R3MG	3.30	3.0	3.5	125	145
TMPC0302H-4R7MG	4.70	2.6	3.0	172	200
TMPC0302H-5R6MG	5.60	2.2	2.6	205	238
TMPC0302H-6R8MG	6.80	1.9	2.2	260	300
TMPC0302H-8R2MG	8.20	1.6	1.9	340	390
TMPC0302H-100MG	10.0	1.4	1.6	366	422

Note:

1. Test frequency : L : 100KHz /1.0V.
2. All test data referenced to 25°C ambient.
3. Testing Instrument : L/Q: HP4284A,CH11025,CH3302,CH1320 ,CH1320S LCR METER / Rdc:CH16502,Agilent33420A MICRO OHMMETER.
4. Heat Rated Current (I rms) will cause the coil temperature rise approximately Δt of 40°C
5. Saturation Current (Isat) will cause L0 to drop approximately 30%
6. The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions.Circuit design,component,PCB trace size and thickness,airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
7. Special inquiries besides the above common used types can be met on your requirement.

## 6. Typical Performance Curves

